


**PIPE OD RANGE**  
with Large Overtop Link

MIN (inches)	MAX (inches)	MIN (mm)	MAX (mm)	*HEAVY DUTY QUICK LINKS EES016
8.0	9.1	203	231	2
9.0	10.3	229	262	3
10.1	11.4	257	290	4
11.2	12.5	284	318	5
12.4	13.7	315	348	6
13.6	14.9	345	378	7
14.7	16.0	373	406	8
15.8	17.1	401	434	9
16.9	18.2	429	462	10
18.0	19.4	457	493	11
19.2	20.5	488	521	12
20.3	21.6	516	549	13
21.4	22.7	544	577	14
22.5	23.8	572	605	15
23.6	24.9	599	632	16
24.7	26.0	627	660	17
25.8	27.1	655	688	18
26.9	28.2	683	716	19
28.0	29.3	711	744	20
29.0	30.4	737	772	21
30.1	31.5	765	800	22
31.2	32.6	792	828	23
32.3	33.6	820	853	24
33.4	34.7	848	881	25
34.5	35.8	876	909	26
35.6	36.9	904	937	27
36.7	38.0	932	965	28
37.8	39.1	960	993	29
38.8	40.2	986	1021	30
39.9	41.3	1013	1049	31
41.0	42.3	1041	1074	32
42.1	43.4	1069	1103	33
43.2	44.5	1097	1130	34

**PIPE OD RANGE**  
with Standard Overtop Link

MIN (in)	MAX (in)	MIN (mm)	MAX (mm)	*HEAVY DUTY QUICK LINKS EES016
6.0	7.3	152	185	2
7.1	8.5	180	216	3
8.5	9.8	216	249	4
9.7	11.0	246	279	5
10.8	12.2	274	310	6
12.0	13.3	305	338	7
13.1	14.5	333	368	8
14.3	15.6	363	396	9
15.4	16.8	391	427	10
16.6	17.9	422	455	11
17.7	19.0	450	483	12
18.8	20.1	478	511	13
19.9	21.2	505	538	14
21.0	22.3	533	566	15
22.2	23.4	564	594	16
23.2	24.5	589	622	17
24.3	25.6	617	650	18
25.4	26.7	645	678	19
26.5	27.8	673	706	20
27.6	28.9	701	734	21
28.7	30.0	729	762	22
29.8	31.1	757	790	23
30.9	32.2	785	818	24
32.0	33.3	813	846	25
33.0	34.4	838	874	26
34.1	35.5	866	902	27
35.2	36.6	894	930	28
36.3	37.6	922	955	29
37.4	38.7	950	983	30
38.5	39.8	978	1011	31
39.6	40.9	1006	1039	32
40.6	42.0	1031	1067	33
41.7	43.1	1059	1095	34

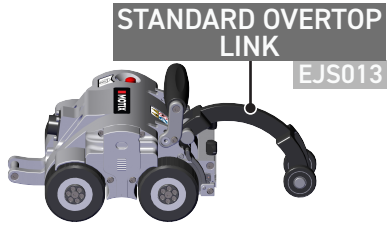

\* Heavy Duty QuickLinks include the Heavy Duty Dovetail QuickLink

# MOTIX KEY PARTS

